


SURGERY

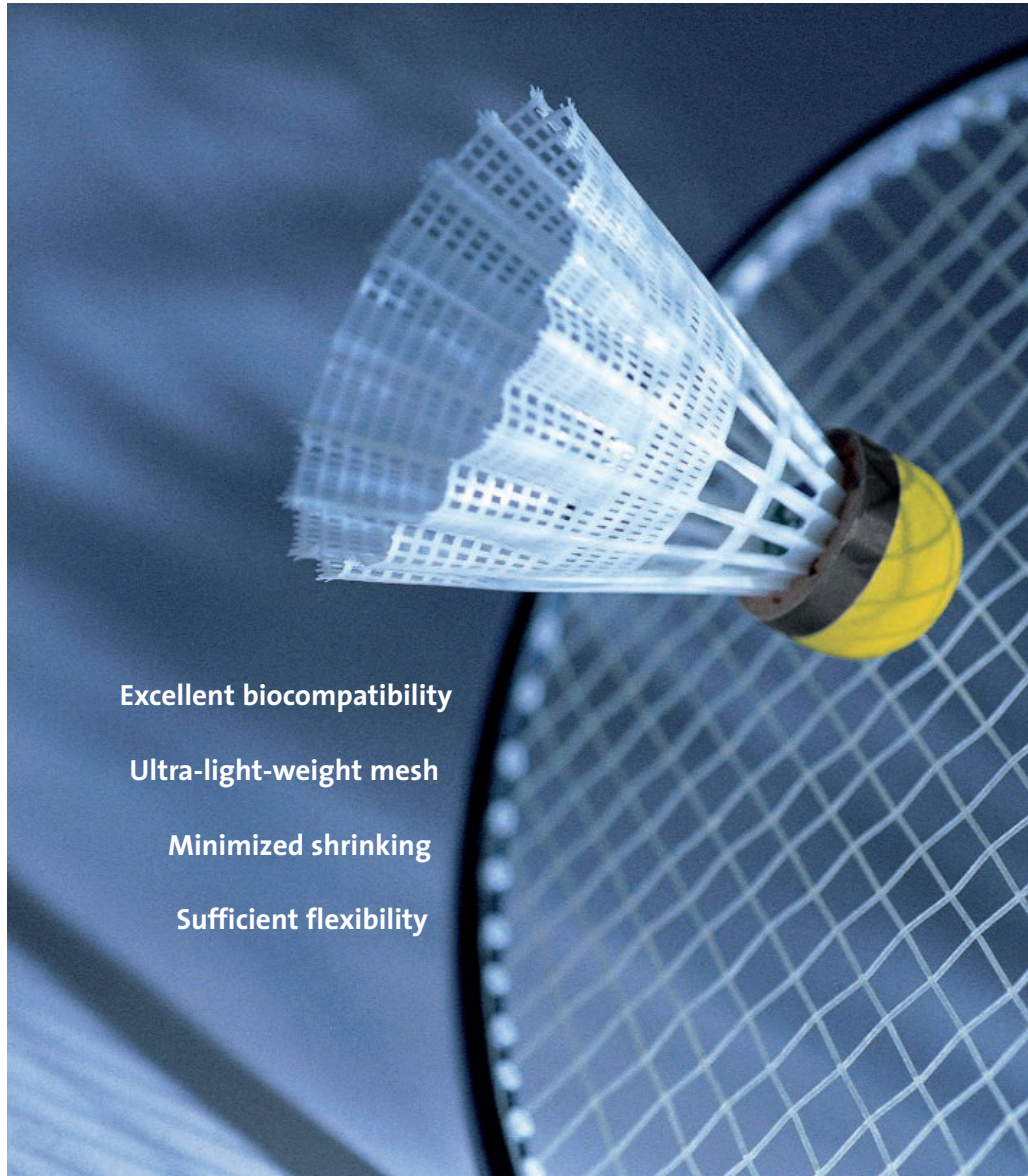

Excellent biocompatibility


Ultra-light-weight mesh


Minimized shrinking

Sufficient flexibility

TiMESH®

the titanized mesh for medical treatment
of inguinal and incisional hernias



 Titanized Polymers

ptm

Titanized soft tissue reinforcement implant for hernia repair

Application

TiMESH® is intended for various indications regarding the use of soft tissue reinforcement implants, e.g. medical treatment of inguinal and incisional hernia.

Design

TiMESH® is especially designed for:

- ▶ all state-of-the-art mesh-surgery techniques
- ▶ inguinal, incisional, umbilical, parastomal and hiatus hernia repair
- ▶ intraperitoneal and peritoneal use

Material

- ▶ titanized polypropylene
- ▶ prosthetic mesh
- ▶ monofile fiber
- ▶ pore size ≥ 1 mm
- ▶ tensile strength ≥ 16 N/cm
- ▶ laser-cut edges

With a grammage of only 16 g/m² TiMESH® meets the high standards of modern, patient-oriented hernia surgery.

Implantation procedure


For inguinal hernia treatment TiMESH® can be used in both, open and laparoscopic implantation (e.g. TAPP, TEP).

For incisional hernia treatment TiMESH® can be implanted as follows:

- (a) in the peritoneum,
- (b) between the abdominal wall and the peritoneum or
- (c) before the deep muscle layer.

The outstanding effectiveness of titanized polypropylene in hernia surgery has been demonstrated in more than 200,000 operations worldwide.


REF	Description	PU
6000004	TiMESH® extralight (16 g/m ²), 10 x 15 cm (4" x 6")	3
6000029	TiMESH® extralight (16 g/m ²), 15 x 15 cm (6" x 6")	3
6000028	TiMESH® extralight (16 g/m ²), 20 x 15 cm (8" x 6")	3
6000001	TiMESH® light (35 g/m ²), 10 x 15 cm (4" x 6")	3
6000030	TiMESH® light (35 g/m ²), 15 x 15 cm (6" x 6")	3
6000016	TiMESH® light (35 g/m ²), 20 x 15 cm (8" x 6")	3
6000073	TiMESH® light (35 g/m ²), 30 x 30 cm (12" x 12")	1
6000470	TiMESH® strong (65 g/m ²), 10 x 15 cm (4" x 6")	3
6000471	TiMESH® strong (65 g/m ²), 15 x 15 cm (6" x 6")	3
6000425	TiMESH® strong (65 g/m ²), 20 x 15 cm (8" x 6")	3
6000426	TiMESH® strong (65 g/m ²), 30 x 30 cm (12" x 12")	1

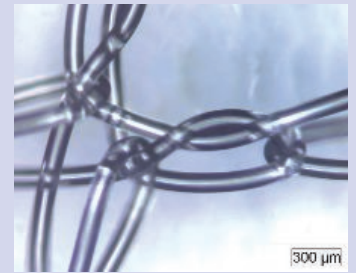

The smooth and flexible fiber (only 16 g/m²) provides optimal biocompatibility and patient comfort, without compromising strength.



Rounded smooth fiber ends, resulting from laser-cut mesh edges, prevent micro traumata.

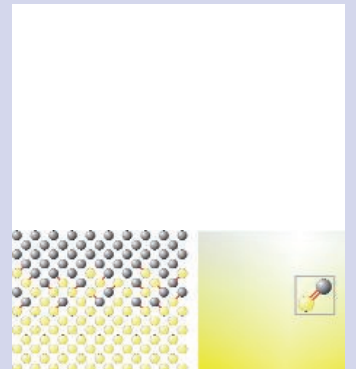

Excellent biocompatibility through a unique combination of a compound material with covalent bonded titanium layer of ~ 30 nm thickness only and a lightweight open porous mesh structure.



Exclusive distributor:
Certified by: ISO 13485 : 2003

pfm · Produkte für die Medizin AG
Wankelstraße 60 · D - 50996 Köln, Germany
Phone +49 (0) 2236 9641-0 · Fax +49 (0) 2236 9641-20
zentrale@pfm-ag.de · www.pfm-ag.de



Manufactured by:
Certified by: ISO 13485 : 2003

GfE Medizintechnik GmbH
Hoefener Strasse 45 · D-90431 Nuremberg
Phone: +49 (0) 911 9315-601 · Fax +49 (0) 911 9315-650
info@gfe-medical.com · www.gfe-medical.com